

The NEW Standard in Trench Cover Safety

Trench-Guard™



Interlocking flanges safely hold Trench-Guards together.

NEW Interlocking Trench Covers

The Trench -Guard system from GreenTek sets a new standard in trench cover safety.

A careful assessment of trench covering methods presently being used reveals serious shortcomings, which the new Trench-Guard system fully overcomes.

The fibreglass or plywood boards traditionally used in this industry have no means of being joined together, thus running the risk of them moving apart and leaving a dangerous hole that a vehicle or pedestrian might slip down. By contrast, the new Trench-Guard panels have interlocking flanges that connect them firmly together to prevent this happening.

Also, they are made from an ultra tough plastic which, unlike plywood or fibreglass, does not become splintered and sharp on the edges with regular use.

The panels and their matching rubber end ramps have only a very gentle slope on their edges, thus making them extra safe for use in pedestrian areas.

In every way, the Trench-Guard system sets the new standard in safety for trench protection.



Trench-Guards do not splinter on the edges (unlike fibreglass or plywood).

Tel: 0844 477 2909 www.groundguards.com

 **NIXON**
HIRE.co.uk

TG.N.04.11




Trench-Guard™

- ✓ Superior safety trench cover system
- ✓ Ultra tough plastic does not splinter on edges
- ✓ Panels interlock without tools for safety
- ✓ Steel reinforced honeycomb structure
- ✓ Light-weight easy to handle
- ✓ Will support a load of 500 kg per wheel over a 600mm trench
- ✓ Size: 1.4 x 0.8m



Trench-Guards provide ideal pavement crossings for vehicles and pedestrians during utility works.

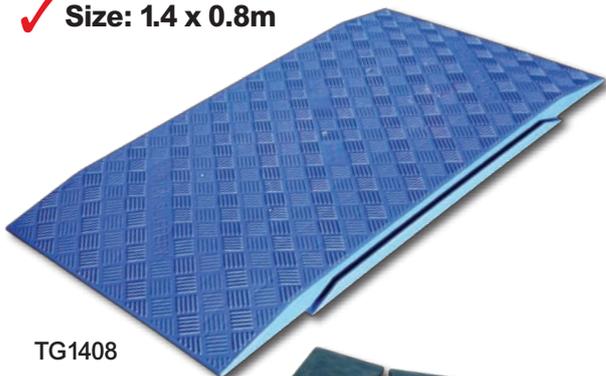

TG1408



TGR

Code	Size	Weight	Load	Span
TG1408	1.4m x 0.8m	22kg	500kg per wheel i.e. 2 tonne car	600mm
TGR	1.4m x 0.2m	14kg	Use only in conjunction with TG1408 Trench-Guards	

Not for highway use - pedestrians and light vehicles only.

Tel: 0844 477 2909 www.groundguards.com

