




OPERATING WEIGHT: 2650kg, 2715kg and 2740kg OPERATING CAPACITY: 630kg, 720kg and 820kg

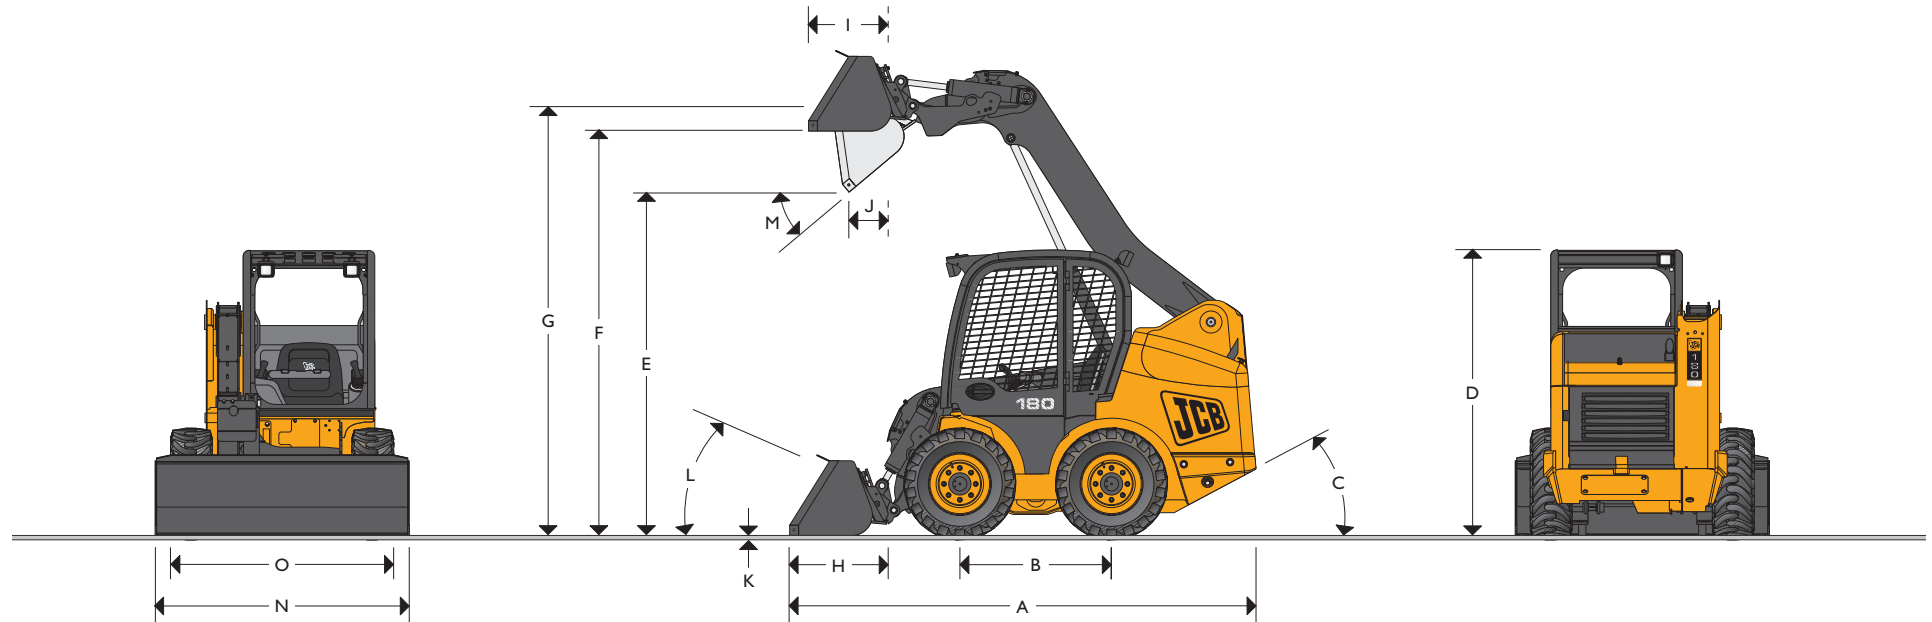

STATIC DIMENSIONS

	160 m (ft-in)	170/180 m (ft-in)
A Overall length	3.27 (10-8½)	3.27 (10-8½)
B Wheel base	1.03 (3-4½)	1.03 (3-4½)
C Angle of departure	28°	28°
D Overall height	1.93 (6-4)	1.94 (6-4½)
E Dump height	2.16 (7-1)	2.29 (7-6)
F Loadover height	2.65 (8-8)	2.78 (9-1¼)
G Height to hinge pin, fully raised.	2.80 (9-2¼)	2.93 (9-7¼)
H Reach at ground level (toe plate horizontal)	0.86 (2-9¼)	0.86 (2-9¼)
I Max reach at full height	0.76 (2-6)	0.76 (2-6)
J Reach at full height – fully dumped	0.47 (1-6½)	0.47 (1-6½)
K Dig depth (toe plate horizontal) clearance	-15mm (-½)	-15mm (-½)
L Rollback at ground	30°	30°
M Dump angle	40°	40°
N Shovel width – standard	1.43 (4-8)	1.58 (5-2) / 1.73 (5-8)

	160 m (ft-in)	170/180 m (ft-in)
Shovel width – optional	1.58 (5-2)	1.73 (5-8)
O Width over tyres – standard	1.37 (4-6)	1.52 (4-11¾) / 1.60 (5-3)
Width over tyres – optional	1.52 (5.0)	1.52 (5.0)
Lift capacity at full height	SAE kg 630	720 / 820
Maximum tipping load	SAE kg 1260	1440 / 1640
Shovel capacity – standard	cu.m 0.29	0.36 / 0.45
Pallet fork rated capacity (50% safety factor at 400mm load centre) EN	488kg	545kg / 560kg
Pallet fork lift height	2.70 (8-10)	2.83 (9.3½)
Turning radius		
Bucket corner radius	1.97 (6.5½)	1.97 (6.5½)
Quick hitch radius	1.22 (4-0)	1.22 (4-0)
Rear chassis radius	1.62 (5.3½)	1.62 (5.3½)



MACHINE RATING

Rated operating capacity (SAE):		kg	
I60		630	
I70		720	
I80		820	
Tipping load:			
I60		1260	
I70		1440	
I80		1640	
Breakout force		High performance GP Shovel 0.36m³	Low back shovel 0.34m³
Loader I60	kgf	1425	1332
Shovel I60	kgf	2046	1690
Loader I70	kgf	1431	1383
Shovel I70	kgf	1962	1703
Loader I80	kgf	1497	1446
Shovel I80	kgf	2060	1681

ENGINE

		I60/I70	I80
Model		Perkins 404D-22	Perkins 404DT-22
Displacement	litres	2.2	2.2
Fuel		Diesel	Diesel
Cooling		Water	Water
Bore	mm	84	84
Stroke	mm	100	100
Gross power @ 2800 rpm			
ISO 14396	kW (hp)	37.3 (50)	44.7 (60)
Gross torque @ 1800 rpm			
ISO 14396	Nm (lb/ft)	143 (105)	192 (141.6)
Emission certification		EC Stage IIIA/USA EPA Tier 3	EC Stage IIIA/USA EPA Tier 3
Engine oil service intervals		500 hours	500 hours

TRANSMISSION

The full servo controlled hydrostatic transmission giving zero to maximum speed, both forward and reverse at full power. Independent transmission systems for both the left and right side, controlled through servo controls for precise and easy operation. Transmission power management system maintains full engine power availability maximising loader and attachment control.
Travel speeds both forward and reverse: 11 kph (6.8mph)

CAPACITIES

I60, I70 and I80	litres (gal)
Hydraulic system (inc. Tank)	46 (10.1)
Fuel tank	80 (17.6)
Engine coolant	10 (2.64)
Engine oil	9.6 (2.5)
Chain case	17 (3.7)

CONTROLS

Three machine control format options. JCB full servo controls, which reduce lever efforts to a minimum, alternatively, either full servo hand or servo hand and manual foot controls provide patterns well known and accepted by the skid steer buyer and operator. With all options the left hand control lever pivots rearwards, providing unparalleled machine access/egress.

WEIGHT

SAE operating weight.

Fully operational with quickhitch, standard shovel, full fuel tank, fully glazed cab + 75kg operator

I60	2650 kg
I70	2715 kg
I80	2740 kg

TYRES

I60 Standard	–	7.00 x 15 – 6pr
I70 Standard	–	10 x 16.5 – 6pr
I80 Standard	–	10 x 16.5 – 8pr
Available Options	–	Standard Track Heavy-duty Life Master Extra Floation XZM XZSL Solid Industrial

Floation tyres are fitted for most applications. *For arduous conditions and hostile environments solid tyres are recommended.

*For hard standing duties Lifemaster tyres are recommended.



HYDRAULICS

In addition to the main hydrostatic drive pumps there is a dedicated loader and attachments supply pump (auxiliary hydraulics circuit is optional on all base models and standard on high flow model.)

Pump flow: 68 litres / minute (14.95gal/min) @ 2800 rpm engine speed
Main relief pressure 205 bar (3000 psi)

- Low lever efforts give excellent and easy control of transmission loader and attachments.
- Auxiliary hydraulics are actuated via the right hand controller giving progressive control of oil flow for precise attachment control.
- Hydraulic supply pipes run neatly on top of the loader arm under a protective guard for long life.
- Full flow, spin-on type hydraulic oil filter.
- JCB high performance hydraulic oil
- The optional hi-flow circuit provides 124 litres/min (27.3 gal/min) pump flow to the front of the machine for operation of high capacity attachments such as trenchers and patch planers.

OPERATOR ENVIRONMENT

Full ROPS and Level I FOPS, full audio and visual warning systems, Soundproofing gives noise levels complying with EC regulations. Safe access through side door – thanks to JCB's unique single arm design.

- Unequalled all-round visibility.
- Fully adjustable suspension seat.
- Retractable seat belt fitted as standard.
- Drainage cover for easy cleaning of cab.

All in a bigger, more comfortable cab with a superior control layout.

STANDARD EQUIPMENT

ROPS and FOPS integrated canopy. Isolation bar activated safety system. Loader arm safety strut. Centrifugal dry type engine air filter with safety element. Standard shovel. Mechanical quickhitch. Hand throttle. Worklights (EC only). Servo emergency lower valve. Fuel gauge. Electrically operated mechanical park brake.

OPTIONAL EQUIPMENT

Fully glazed cab with heater/demister. Fabric suspension seat. Air conditioning. Road lights. Work lights (not EC). Reverse alarm. Beacon. Foot throttle (not with foot control format). Fire extinguisher. Toolkit. Self levelling lift. Float. Level 2 FOPS guard. Heavy-duty rear door guard. Front screen guard. Auxiliary hydraulics. Bolt on lift points. Battery isolator. Accessory socket. Backhoe mounting brackets. Tooth guard. Wastemaster package. Demolition package. Additional counterweight kits – increases R.O.C by 50kg. RH fender: Custom paint.



A GLOBAL COMMITMENT TO QUALITY

JCB's total commitment to its products and customers has helped it grow from a one-man business into Britain's largest privately owned manufacturer of backhoe loaders, crawler excavators, wheeled excavators, telescopic handlers, wheeled loaders, dump trucks, rough terrain fork lifts, industrial fork lifts, mini/midi excavators, skid steer loaders, tractors and compaction equipment.

By making constant and massive investments in the latest production technology, the JCB factories have become some of the most advanced in the world.

By leading the field in innovative research and design, extensive testing and stringent quality control, JCB machines have become renowned all over the world for performance, value and reliability.

And with a global sales and service network of more than 650 dealers and agents, we aim to deliver the best customer support in the industry.

Through setting the standards by which others are judged, JCB has become one of the world's most impressive success stories.

