


SE Petrol Generator Range

SE 2700 2.7KVA / 2.2KW HONDA GX160 5.5HP

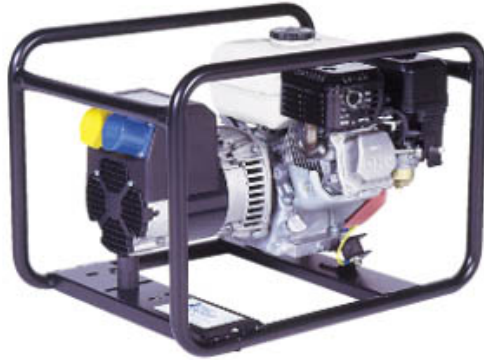

SE Petrol Range

Designed to offer reliable affordable power, featuring genuine Honda industrial quality 'oil alert' engines close coupled to brushless maintenance free alternators with low waveform distortion characteristic. Built to last, with top mounted control boxes, angled anti-vibration mounts and heavy duty steel wrap-around frames

Specifications:

kVA @ 50 Hz 2.7 - **KW @ 50 Hz** 2.2 - **Engine** Honda GX160- **Alternator Type** NSM

Engine HP 5.5

Sockets BS4343 1 x 115v(16A) + 1 x 230v(16A)

Overload Protection R/B

Noise Level dBA @ 7M 73

Fuel Capacity Litres 3.6

Approx Running Hours @ Full Load 2.8

Dimensions L61 - W42 - H41cms -34Kg

OPTIONAL FEATURES: Electric Start, Single Voltage, Gas Conversions, Availability and Price on Application.